

H 9 0 0 S E R I E S


Relief Valves



- - For use in very high pressure and hard conditions.
- - Made from A.I.S.I. 316.
- - Available in all pipe threads and Let Lok connectors.
- - Sizes: 1/4" or 6mm.

Materials of Construction

NAME	MATERIAL	QTY.	REMARKS
Cap Lable	Polyester	1	
O ring	Viton	1	Type 2 - 015
Cap Plug	Polypropylene	1	
Spring	A.I.S.I. 302	1	
O-Ring	Viton	1	Type 2 - 011
O-Ring	Viton	1	Type 2 - 106
Locking Nut	A.I.S.I. 316	1	
Adjustment Cap	A.I.S.I. 316	1	
Spring Support Disc	A.I.S.I. 316	1	
Stopper	A.I.S.I. 316	1	
Stem	A.I.S.I. 316	1	
Poppet	A.I.S.I. 316	1	
Lower Seal	TFE + A.I.S.I. 316	1	
Insert	A.I.S.I. 316	1	
Bonnet	A.I.S.I. 316	1	
Body	A.I.S.I. 316	1	

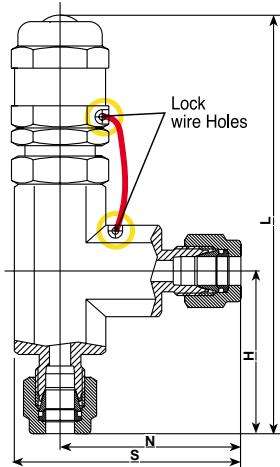

Dimensions:

Cat. No	Connection/Size					
	inlet	outlet	H	N	S	L
H-900	1/4 LET-LOK	1/4 LET-LOK	37	39	50	105
H-900	6mm LET-LOK	6 mm LET-LOK	37	39	50	105
H-985	1/4 Male NPT	1/4 Female NPT	32	30	40	100
H-995	1/4 Male NPT	1/4 LET-LOK	32	39	50	100

How to Order

H-900

Body Designator
900-LET-LOK to LET-LOK

SS

Material Designator
SS=316SS

L

Ends Connections
Designator
L=LET-LOK
N=NPT
NL=NPT to LETLOK

1/4

Size Designator

SL

SL = SILVER
Code For
Spring Range
0 - 225 psi